


AluCliK

AC-8 120x100

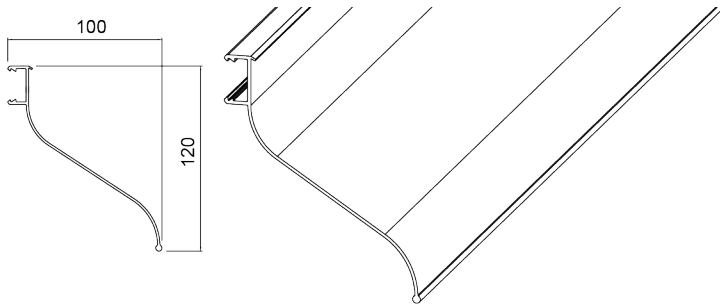


VAKIO SÄLEJAOT

Sälejako (mm)	65	70	80	90	100	110	120	130	140	150	160	170
Vapaa p.a. (%)	27	31	37	43	47	50	53	53	57	57	56	55
Paino (kg/m ²)	12.5	11.6	10.2	9.1	8.2	7.4	6.8	6.3	5.8	5.4	5.1	4.8

TILAVARAUS (SYVYYS) ACE-JÄRJESTELMÄLLÄ

Asennusosa	ACE-AC (Säätökisko)	ACE-H25	ACE-R50 Vertical	ACE-H76	ACE-R77
Tilavaraus	114	129	155	181	181

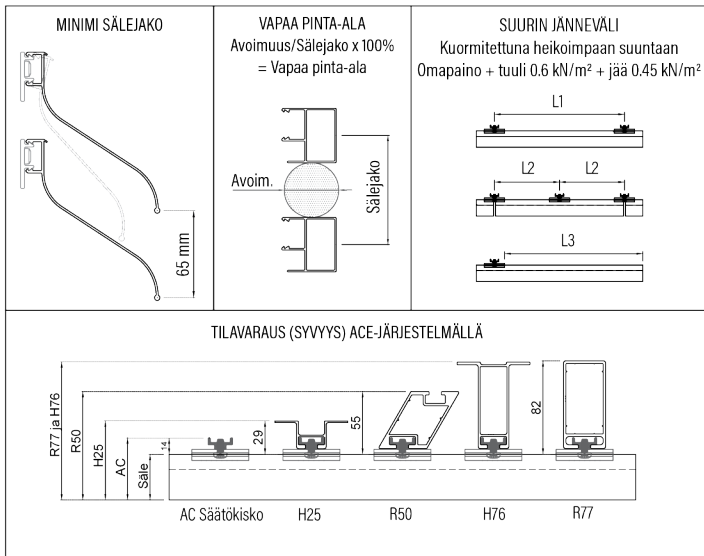

- Max. slot length in Alupro standard deliveries 3800 mm
- Max. slot length in special orders 7000 mm
- Max. slot length anodized 5900 mm
- Material: aluminium EN-AW 6063

MAXIMUM RECOMMENDED SPANS

- L1 max. 1500 mm
- L2 max. 1500 mm (distance to the seam)
- L3 max. 300 mm (free overhang)

MOUNTING FRAME ATTACHMENTS

- on a case-by-case basis, usually with a vertical grille, screw fastenings every 500 mm

SURFACE TREATMENTS / COATINGS

In powder coating, powder is sprayed on the surface of the profile, which is melted in the oven to form a durable and even surface. Before coating, the profiles are pre-treated to ensure the permanence of the paint. We use shades from the RAL color chart, but other shades are also possible. Anodizing or anodizing: Anodizing is an electrochemical method used to increase the thickness of aluminium's natural oxide layer. Anodizing creates a hard, mechanical wear-resistant surface with excellent weather resistance.

